


OMNIA

Tilt & Turn Window

The OMNIA Tilt and Turn window combines sleek aesthetics with practical performance in a double flush, double rebated design.

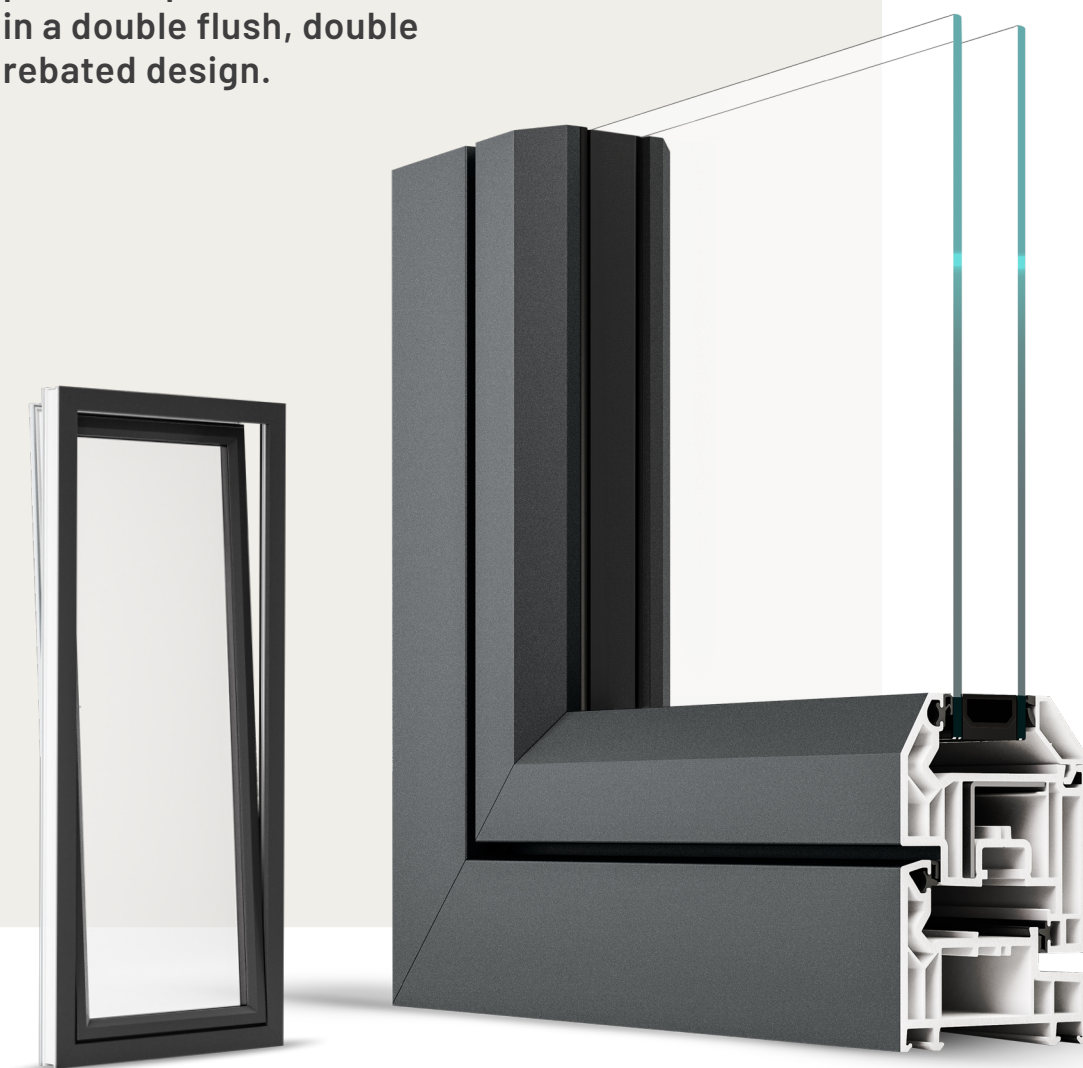

VEKA

U-Values
with Triple
Glazing as low as:

0.79
W/m²K

U-Values
with Double
Glazing as low as:

1.2
W/m²K

Available in a large
assortment of colours
and woodgrain
options from
the Variations
range

Test Results


Window type: Top hung

Max sash sizes (wxh)	1200mm x 2100mm
Air permeability	Class 4
Water tightness	Class 9A
Resistance to wind	A5
Exposure category	2000+

OMNIA
by imagine a VEKA plc brand



Technical Drawing

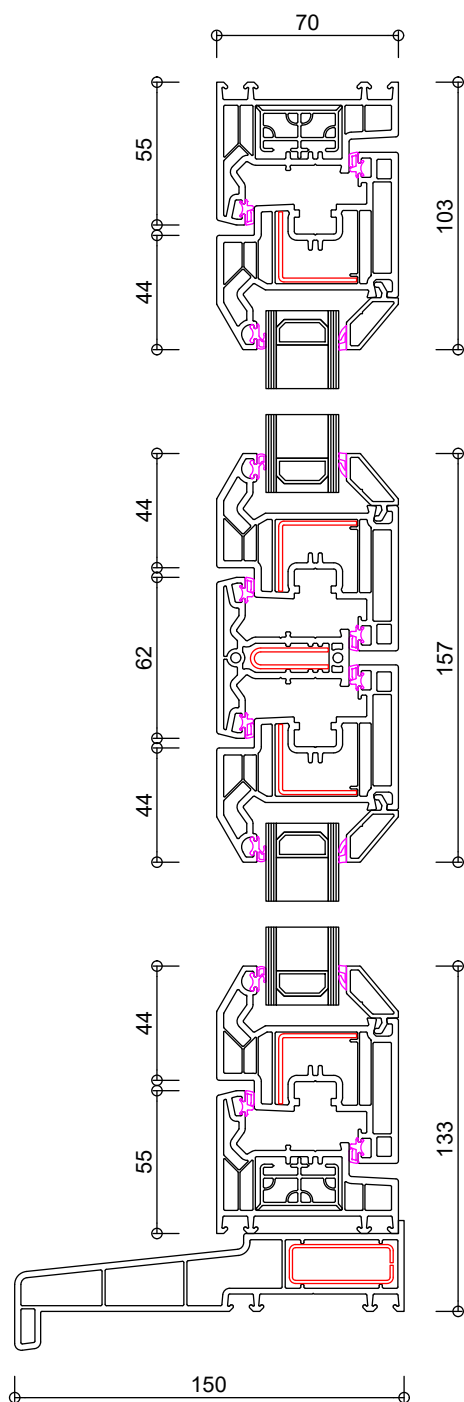

Features and Benefits



Improved ventilation

Bringing together the demand for flush with the dual functionality of tilt & turn for improved ventilation.



Rider block mechanism

Helping maintain the integrity of profile during fabrication and installation.



Installation

Designed to support straightforward installation and a consistent finish when fitted correctly.



Aluminium aesthetic

Feinstruktur enables a PVCu frame to achieve an aluminium-inspired appearance.

Maximum sash sizes

Tilt & Turn: 1200mm (w) x 2100mm (h)

Outer frames

55mm and 67mm outer frames

Mullions

62mm and 84mm mullions

Sash

76mm sash

Glazing beads

- | | |
|-------------------|-----------------|
| • 10mm bevelled | • 28mm rebated |
| • 28mm bevelled | • 36mm bevelled |
| • 28mm sculptured | • 40mm bevelled |
| • 28mm putty | • 44mm bevelled |

Ancillaries

Frame extensions, thermal inserts, cills and weathering trims

Range of coupling options

Range of bay pole options