

Halo Rustique

Casement Window

The Halo Rustique Casement Window combines the authenticity of a traditional sculptured window, with modern performance.



VEKA

U-Values
with Triple
Glazing as low as:

0.82
W/m²K

U-Values
with Double
Glazing as low as:

1.2
W/m²K



Available in a large
assortment of colours
and woodgrain
options from
the Variations
range

Test Results

Window type: Top hung reinforced

Max sash sizes (wxh)	1400mm x 1400mm
Air permeability	Class 3
Water tightness	Class 7A
Resistance to wind	A3
Exposure category	1200

Window type: Fixed light part reinforced

Max sash sizes (wxh)	3000mm x 3000mm
Air permeability	Class 4
Water tightness	Class E750
Resistance to wind	A4
Exposure category	1600


Window type: Side hung reinforced

Max sash sizes (wxh)	800mm x 1550mm
Air permeability	Class 4
Water tightness	Class 8A
Resistance to wind	A4
Exposure category	1600





Technical Drawing

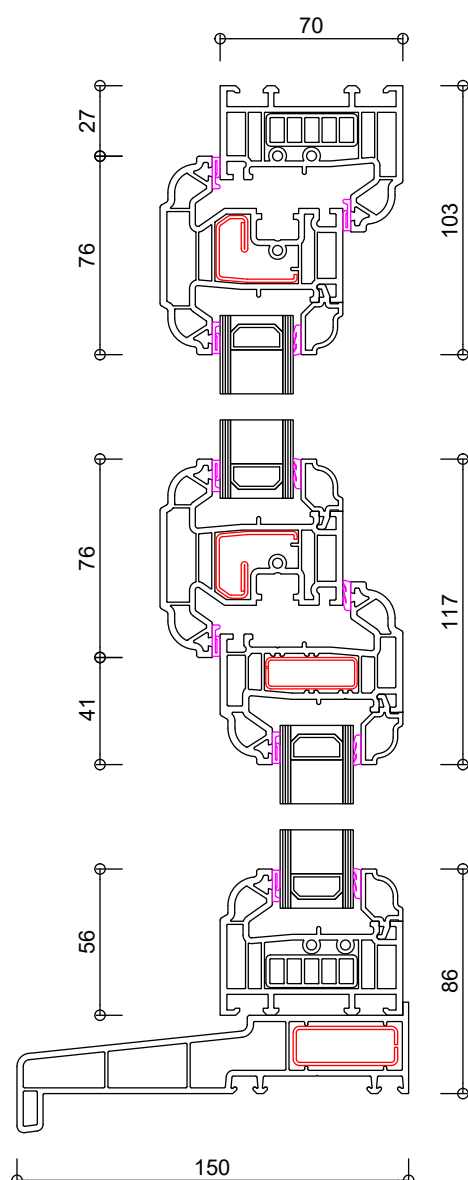

Features and Benefits



Traditional sculptured finish

A fully sculptured profile that offers a softer, more decorative appearance, ideal for period homes or traditional aesthetics.



Excellent acoustic insulation

The multi-chambered profile offers strong soundproofing benefits, perfect for properties in noisy areas.



Versatile design options

Available in a wide range of colours, foils, and glazing options, for greater design flexibility and customisation.



Enhanced security

Compatible with high-security locking systems and accredited by PAS 24, helping meet modern security standards.

Maximum sash sizes

Top hung: 1400mm (w) x 1400mm (h)

Side hung: 800mm (w) x 1550mm (h)

Fixed light: 3000mm (w) x 3000mm (h)

Outer frames

56mm, 72mm and 84mm outer frames

Mullions

70mm or 95mm mullions

Sash

75mm casement sash

Glazing beads

- | | |
|-------------------|-----------------|
| • 24mm sculptured | • 36mm bevelled |
| • 28mm sculptured | • 40mm bevelled |
| • 32mm sculptured | |

Ancillaries

Frame extensions, thermal inserts, cills and weathering trims

Range of coupling options

Range of bay pole options