

Halo

Top Swing Window

The Top Swing Window can be suitable for locations where internal access to the outside face of the window is required for cleaning or maintenance.

VEKA

U-Values
with Triple
Glazing as low as:

0.99
W/m²K

U-Values
with Double
Glazing as low as:

1.2
W/m²K

Available in a large
assortment of colours
and woodgrain
options from
the Variations
range

Test Results


Window type: Top hung

Max sash sizes (wxh)	1300mm x 1300mm
Air permeability	Class 3
Water tightness	Class E1050
Resistance to wind	2400
Exposure category	2000





Technical Drawing

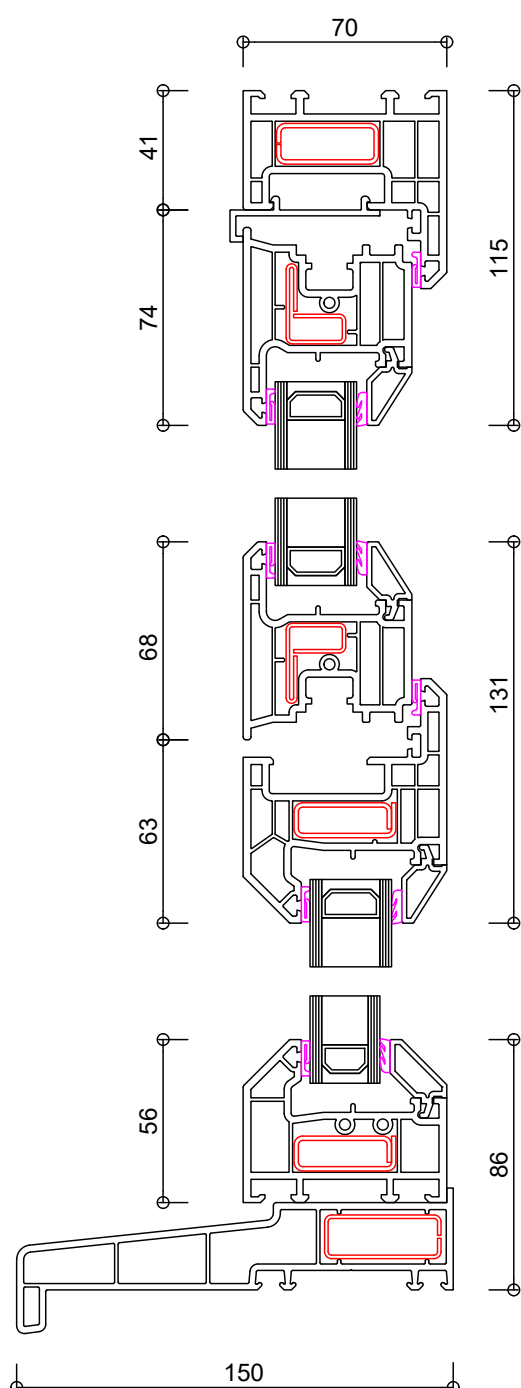

Features and Benefits



Safe 180° top-hung rotation

Top-hinged reversible action allows internal access to the external glass for cleaning, without projecting into the room space



Modern styling

Bevelled design to suit commercial and residential buildings.



Security & performance

Compatible with multi-point locking and can be specified to meet PAS 24 and Secured by Design requirements.



Multi-storey projects

Can be used for apartments and commercial buildings, with robust hardware and secure restricted opening options.

Maximum sash sizes

Top hung: 1300mm (w) x 1300mm (h)

Outer frames

68mm outer frame

Mullions

84mm or 100mm mullions

Sash

68mm reversible sash

Glazing beads

- | | |
|-------------------|-------------------|
| • 24mm sculptured | • 32mm sculptured |
| • 24mm bevelled | • 32mm bevelled |
| • 28mm sculptured | • 36mm bevelled |
| • 28mm bevelled | • 40mm bevelled |

Ancillaries

Frame extensions, thermal inserts, cills and weathering trims

Range of coupling options

Range of bay pole options