

VEKA

# Fully Reversible Window

The VEKA Fully Reversible Window can be suitable for multi-storey properties, providing internal access to the external glass for cleaning and maintenance.



VEKA

U-Values  
with Triple  
Glazing as low as:

0.90  
W/m<sup>2</sup>K

U-Values  
with Double  
Glazing as low as:

1.2  
W/m<sup>2</sup>K

Available in a large  
assortment of colours  
and woodgrain  
options from the  
Variations  
range

## Test Results


### Window type: Top hung

Max sash sizes (wxh)	1308mm x 1308mm
Air permeability	Class 2
Water tightness	Class E1050
Resistance to wind	AE2400
Exposure category	2000+





## Technical Drawing

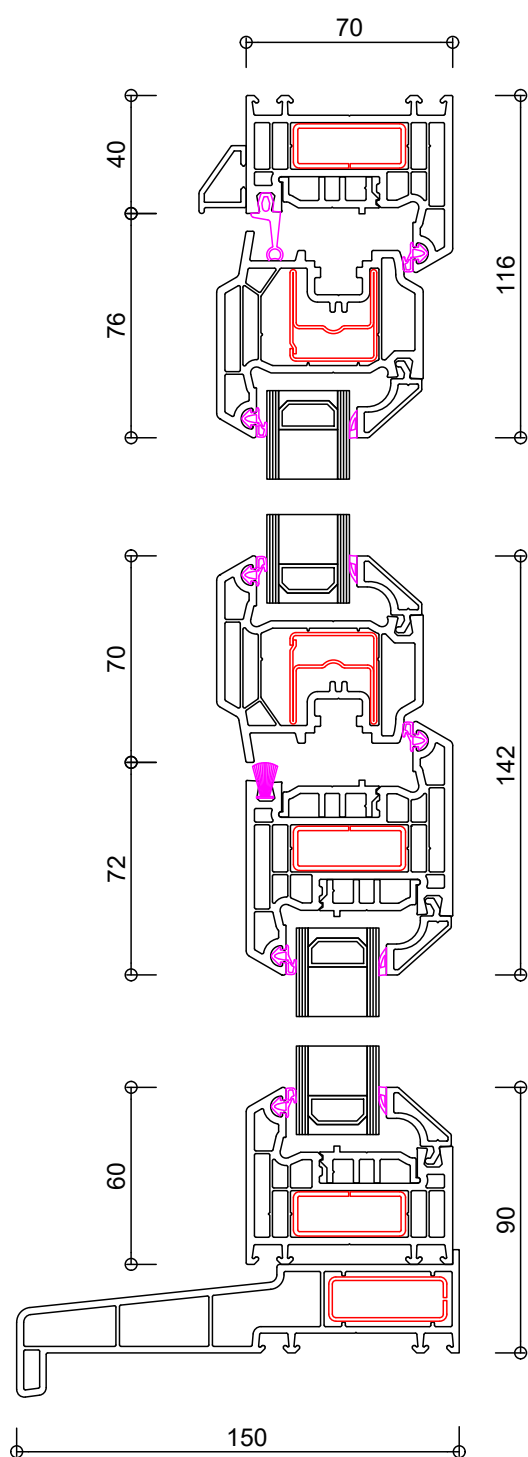

## Features and Benefits



### Full rotation for cleaning

The sash rotates 180° externally, allowing internal access to the outer pane for cleaning. This can be suitable for high-rise or hard-to-access locations



### Slim, modern profile

Clean sightlines and a contemporary bevelled design make it visually suited for both residential and commercial projects.



### Weather performance

Designed to support wind and water resistance in line with relevant standards, including use in more exposed environments.



### Ventilation positions

Includes intermediate ventilation positions designed to provide controlled airflow while maintaining performance

### Maximum sash sizes

Fully Reversible: 1400mm (w) x 1400mm (h)

### Outer frames

60mm outer frame

### Mullions

76mm T mullion

86mm T & Z mullions

### Sash

70mm reversible sash

### Glazing beads

- |                   |                   |
|-------------------|-------------------|
| • 28mm bevelled   | • 40mm bevelled   |
| • 28mm sculptured | • 40mm sculptured |
| • 36mm bevelled   | • 44mm bevelled   |
| • 36mm sculptured |                   |

### Ancillaries

Frame extensions, cills and weathering trims

Range of coupling options

Range of bay pole options