


**Halo System 10**

# Casement Window

The System 10 Casement Window offers a clean, contemporary appearance with a modern bevelled design.

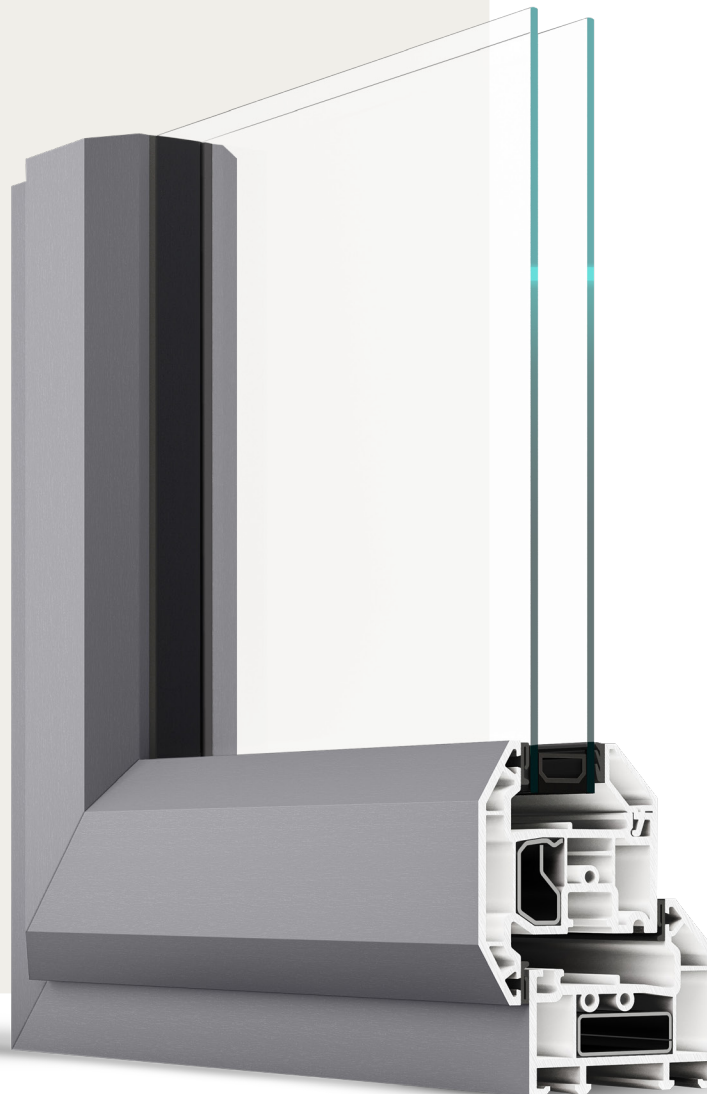

**VEKA**

U-Values  
with Triple  
Glazing as low as:

**0.83**  
W/m<sup>2</sup>K

U-Values  
with Double  
Glazing as low as:

**1.2**  
W/m<sup>2</sup>K

Available in a large  
assortment of colours  
and woodgrain  
options from  
the Variations  
range

## Test Results

### Window type: Top hung reinforced

Max sash sizes (wxh)	1400mm x 1400mm
Air permeability	Class 3
Water tightness	Class 7A
Resistance to wind	A3
Exposure category	1200

### Window type: Side hung reinforced

Max sash sizes (wxh)	800mm x 1550mm
Air permeability	Class 4
Water tightness	Class 8A
Resistance to wind	A4
Exposure category	1600


### Window type: Fixed light part reinforced

Max sash sizes (wxh)	3000mm x 3000mm
Air permeability	Class 4
Water tightness	Class E750
Resistance to wind	A4
Exposure category	1600





## Technical Drawing

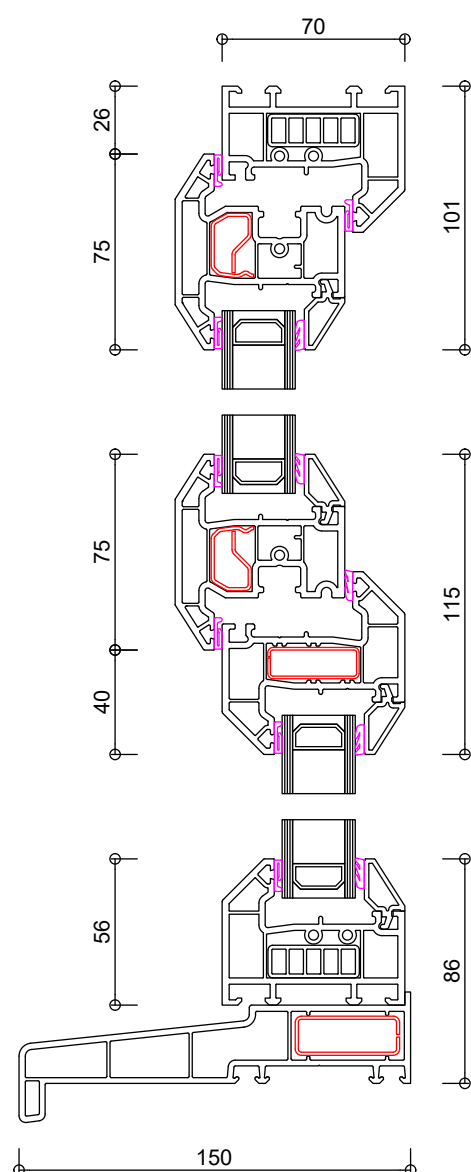

## Features and Benefits



### Clean, bevelled design

Featuring a simple bevelled edge for a crisp, understated look—well-suited to both new-build and replacement markets.



### Ease of fabrication & installation

Compatible with a range of ancillaries and reinforcement options to support efficient fabrication and fitting.



### Performance

Designed to meet relevant standards for strength, weather resistance and security.



### Flexible configuration

Can be integrated with Halo Rustique allowing for more customised designs.

### Maximum sash sizes

Top hung: 1400mm (w) x 1400mm (h)

Side hung: 800mm (w) x 1550mm (h)

Fixed light: 3000mm (w) x 3000mm (h)

### Outer frames

56mm, 72mm and 84mm outer frames

### Mullions

70mm or 95mm mullions

### Sash

75mm casement sash

### Glazing beads

- |                   |                   |
|-------------------|-------------------|
| • 24mm sculptured | • 32mm sculptured |
| • 24mm bevelled   | • 32mm bevelled   |
| • 28mm sculptured | • 36mm bevelled   |
| • 28mm bevelled   | • 40mm bevelled   |

### Ancillaries

Frame extensions, thermal inserts, cills and weathering trims

Range of coupling options

Range of bay pole options