VEKA

FlushSash Casement Window

VEKA FlushSash Casement Windows offer an effective flush casement, perfect for traditional properties.





1.0 W/m2K


U-Values with Double Glazing as low as:



1.2 W/m2K





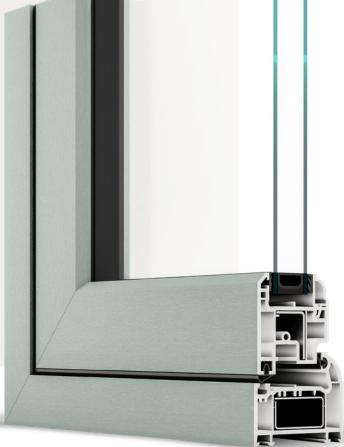

Test Results

Window type: Top hung reinforced

| Max sash sizes (wxh) | 1376mm x 1376mm |
|----------------------|-----------------|
| Air permeability | Class 3 |
| Water tightness | Class E1050 |
| Resistance to wind | AE2400 |
| Exposure category | 2000+ |

Window type: Side hung reinforced

| Max sash sizes (wxh) | 776mm x 1526mm |
|----------------------|----------------|
| Air permeability | Class 4 |
| Water tightness | Class 6A |
| Resistance to wind | А3 |
| Exposure category | 1200 |












Technical Drawing

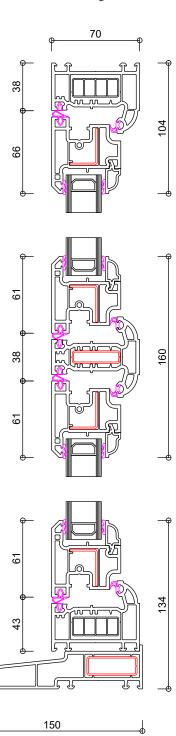

Features and Benefits



Authentic timber look exterior

The sash sits flush within the frame, replicating traditional timber windows —ideal for conservation areas and heritage homes.



Slimline aesthetic

Narrow profiles and clean edges offer a sleek, understated finish suited to both period and contemporary properties.



High energy efficiency

Multi-chambered profiles and optional triple glazing provide excellent insulation and thermal performance.



Low maintenance durability

Unlike timber, VEKA FlushSash won't warp or rot and requires minimal upkeep over time.

Maximum sash sizes

Top hung: 1376mm(w) x 1376mm(h) Side hung: 776mm(w) x 1526mm(h)

Outer frames

56mm, 70mm and 85mm outer frames

Mullions

64mm or 70mm mullions

Sash

61mm FlushSash

Glazing beads

- 28mm bevelled
- 32mm bevelled
- 28mm sculptured

Ancillaries

Frame extensions, thermal inserts, cills and weathering trims

Range of coupling options

Range of bay pole options