


OMNIA

Casement Window

OMNIA Casement Window is part of an suite of double flush double rebated windows and doors.

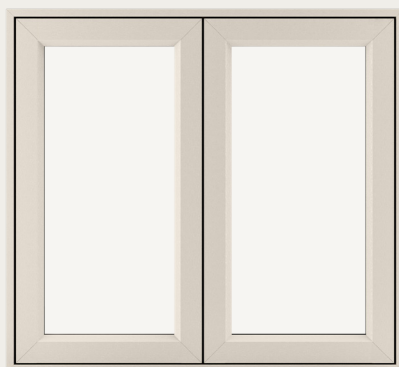

VEKA

U-Values
with Triple
Glazing as low as:

0.75
W/m²K

U-Values
with Double
Glazing as low as:

1.2
W/m²K

Available in a large
assortment of colours
and woodgrain
options from
the Variations
range

Test Results


Window type: Top hung

Max sash sizes (wxh)	1500mm x 1500mm
Air permeability	Class 4
Water tightness	Class 9A
Resistance to wind	A5
Exposure category	2000


Window type: Side hung

Max sash sizes (wxh)	850mm x 1600mm
Air permeability	Class 4
Water tightness	Class 9A
Resistance to wind	A5
Exposure category	2000

OMNIA
by imagine a VEKA plc brand



Technical Drawing

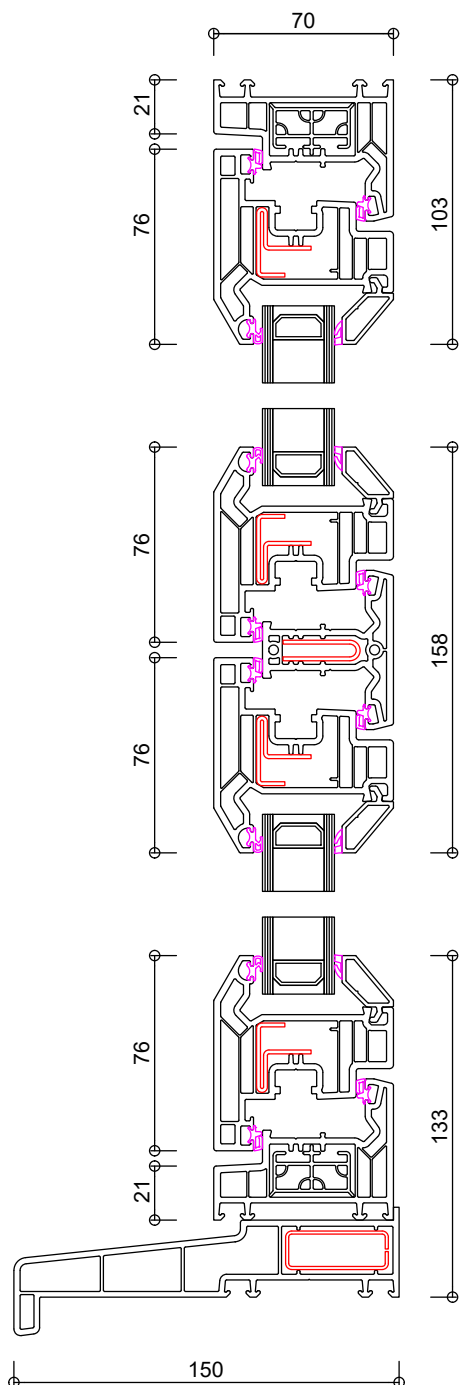

Features and Benefits



Modern casement aesthetic

Clean lines and sleek profile suitable for both traditional and contemporary styles.



Timber-style corners

For those seeking a classic, authentic look with the durability of modern materials.



Zero sight-line mullion

OMNIA's zero sight-line mullion is designed to create a more continuous glazed appearance.



Ultra compatibility

Compatibility with a range of premium fixtures, fittings and hardware that complement the OMNIA system and support smooth operation and consistent performance.

Maximum sash sizes

Top hung: 1500mm (w) x 1500mm (h)

Side hung: 850mm (w) x 1600mm (h)

Fixed light: 3000mm (w) x 3000mm (h)

Outer frames

55mm and 67mm outer frames

Mullions

62mm and 84mm mullions

Sash

76mm T or Z sash

Glazing beads

- | | |
|-------------------|-----------------|
| • 10mm bevelled | • 28mm rebated |
| • 28mm bevelled | • 36mm bevelled |
| • 28mm sculptured | • 40mm bevelled |
| • 28mm putty | • 44mm bevelled |

Ancillaries

Frame extensions, thermal inserts, cills and weathering trims

Range of coupling options

Range of bay pole options